


Soft PVC hose with polyester yarn reinforcement, for the delivery of cooling liquids, chemical solutions, foodstuffs and compressed air.

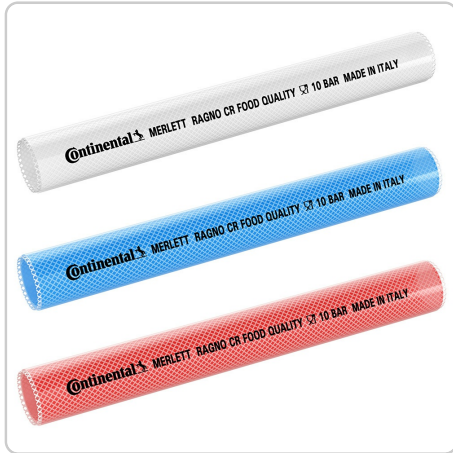

 SMOOTH SURFACE \*\*\*\*\*

 FLEXIBILITY \*\*\*\*\*

 ABRASION RESISTANCE \*\*\*\*

 TEMPERATURE RANGE  
-5 °C 60 °C

 CHEMICAL RESISTANCE  
PVC Table

 CRUSHING RESISTANCE \*\*\*\*

 FOR FOOD  
EU according to Declaration of Conformity.

 O-PHTHALATE FREE \*\*\*\*\*

Ø nominal mm	Ø nominal inch	Ø i.d. mm	Ø o.d. mm	working pressure at 23 °C bar	working press. at 40 °C bar	working press. at 60 °C bar	bursting press. at 23 °C bar	bending radius mm	total thickness mm	weight meter g/m	# wires for angle n° x a°	coil length m	Availability
4		4	10	20	16	12	60	12	3	80	12x45°	100	On demand
6	1/4	6	11	20	16	12	60	19	2.5	80	12x50°	100	In stock
6	1/4	6	12	20	16	12	60	17	3	105	12x54°	100	In stock
6	1/4	6	14	20	16	12	60	15	4	145	12x50°	100	In stock
7		7	13	20	16	12	60	20	3	115	16x45°	100	On demand
8	5/16	8	13	18	13	9	54	28	2.5	105	16x50°	100	In stock
8	5/16	8	14	18	13	9	54	25	3	125	16x50°	100	In stock
8	5/16	8	17	18	13	9	54	22	4.5	220	16x50°	100	In stock
9		9	15	18	13	9	54	32	3	135	16x50°	100	On demand
10	3/8	10	15	18	13	9	54	36	2.5	120	18x50°	100	In stock
10	3/8	10	16	18	13	9	54	30	3	150	18x54°	100	In stock
12		12	17	12	9	6	36	35	2.5	140	18x52°	50	On demand
12		12	18	12	9	6	36	35	3	180	18x52°	50	In stock
13	1/2	13	18	12	9	6	36	43	2.5	150	18x52°	50	In stock
13	1/2	13	19	12	9	6	36	52	3	175	18x52°	50	In stock
15		15	21	10	7	4	30	60	3	215	24x50°	50	On demand
15		15	23	10	7	4	30	60	4	280	24x50°	50	On demand
16	5/8	16	21	10	7	4	30	62	2.5	185	24x50°	50	In stock
16	5/8	16	22	10	7	4	30	60	3	210	24x50°	50	In stock
19	3/4	19	25	10	7	4	30	70	3	260	24x54°	50	In stock
19	3/4	19	26	10	7	4	30	70	3.5	300	24x54°	50	In stock
22		22	30	8	5	3	24	85	4	420	24x54°	50	In stock
25	1	25	32	8	5	3	24	150	3.5	390	24x54°	50	In stock
25	1	25	33	8	5	3	24	110	4	450	24x54°	50	In stock
30		30	38	8	5	3	24	170	4	560	24x54°	50	In stock
32	1 1/4	32	42	8	4	2	24	200	5	700	36x50°	50	In stock
35		35	45	8	4	2	24	250	5	750	36x54°	50	In stock
38	1 1/2	38	48	8	4	2	24	300	5	850	48x54°	50	In stock
40		40	50	8	4	2	24	350	5	880	48x54°	50	On demand
45	1 3/4	45	55	8	4	2	24	420	5	1000	48x50°	50	On demand
50	2	50	60	8	4	2	24	500	5	1100	48x54°	25	On demand
50	2	50	62	8	4	2	24	450	6	1350	48x54°	25	In stock

All technical specifications apply to a temperature of 23° C ± 2° C (ISO 291)  
The tolerance on all specifications ±5% (Tolerance Percentage is applicable on ALL DATA across our range)